


# GATEWAY COMPONENTS

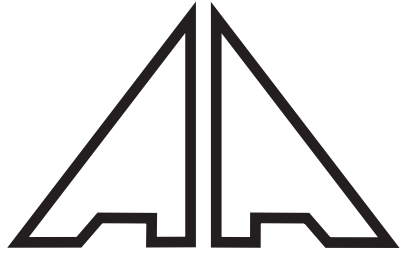

ADDICTIVE AUDIO

## GCS6

65 rms - 150 max  
91.2dB 1w/1m  
Freq. Response  
55Hz - 23kHz

www.ADDICTIVEAUDIOINC.com

### WOOFER

BUTYL RUBBER SURROUND

MICA-INJECTED POLYPROPYLENE CONE

4ohm 1" KAPTON® VOICE COIL

SYMMETRICAL ROLL NC<sup>3</sup> SPIDER

STAMPED STEEL BASKET

10oz. STRONTIUM FERRITE MOTOR

RUBBER MAGNET COVER

MESH GRILL

### TWEETER

.75" ALUMINUM MEMBRANE

(ANTI-CORROSIVE COATING FOR USE IN MARINE AND/OR HUMID APPLICATIONS)

NEODYMIUM MOTOR AND FERROFLUID COOLED

### CROSSOVER

METALIZED POLYPROPYLENE CAPACITORS

AIR AND IRON CORE INDUCTORS

PPTC PROTECTED TWEETER CIRCUIT

SECOND ORDER 6dB CROSSOVER FOR WOOFER

SECOND ORDER 12 dB CROSSOVER FOR TWEETER

